

Get the Power of HILIC and RP Modes in One LC Column

Selectivity Accelerated

Stationary Phase:

FluoroPhenyl







www.restek.com/raptor




The Raptor FluoroPhenyl Column

With Raptor LC columns, Restek chemists became the first to combine the speed of 2.7 and $5~\mu m$ superficially porous particles (also known as SPP or "core-shell" particles) with the resolution of highly selective USLC technology, improving separations and speeding up analysis times with standard HPLC instruments. Raptor then evolved to bring that same improved speed, efficiency, and selectivity to UHPLC analyses by offering $1.8~\mu m$ particle columns. Learn more about Raptor LC columns at www.restek.com/raptor

With the addition of Raptor FluoroPhenyl columns, Restek further expanded the speed and reliability of Raptor column technology into the HILIC realm. Restek's Raptor FluoroPhenyl phase offers chromatographers the ability to run in reversed-phase or HILIC mode for a variety of compounds. The Restek Raptor FluoroPhenyl column is also amenable to LC-MS because it is extremely reliable and efficient with acidic mobile phases.

Switch to a Raptor FluoroPhenyl LC column for reliable performance in both reversed-phase and HILIC modes.

Column Description:



Stationary Phase Category:

Pentafluorophenyl propyl (L43)

Ligand Type: Fluorophenyl

Particle:

1.8 μm, 2.7 μm, or 5 μm superficially porous silica (SPP or "core-shell")


Pore Size:

90 Å

Surface Area:

125 m 2 /g (1.8 μ m), 130 m 2 /g (2.7 μ m), or 100 m 2 /g (5 μ m

Column Interaction Profile:



Defining Solute Interaction:

Cation exchange

Complementary Solute Interactions:

- Polarizability
- Dispersion

Recommended Usage:

pH Range: 2.0-8.0

Maximum Temperature: 80 °C

Maximum Pressure: 1,034 bar/15,000 psi* (1.8 μm), 600 bar/8,700 psi (2.7 μm); 400 bar/5,800 psi (5 μm)

* For maximum lifetime, recommended maximum pressure for 1.8 µm particles is 830 bar/12,000 psi.


Properties:

- Capable of both reversed-phase and HILIC separations.
- Ideal for increasing sensitivity and selectivity in LC-MS analyses.
- · Offers increased retention for charged bases.

Switch to a Raptor FluoroPhenyl LC column when:

- You observe limited retention and selectivity on a C18 for basic compounds.
- You need increased retention of hydrophilic compounds.

Solute Retention Profile:



Target Analyte Structures:

Nitrogen-containing


Target Analyte Functionalities:

- Protonated amines
- Quaternary ammonium compounds
- Positively charged moieties
- Lewis bases



Raptor FluoroPhenyl Columns: Rugged, Check—Reproducible, Double Check.

Of course, Raptor FluoroPhenyl columns are rugged; that is to be expected. And, they are exceptionally reproducible as well. Reproducibility can be an issue for fluorinated phenyl phases, which is why we engineered all our columns for dependable performance. Lot to lot, column to column, and injection to injection, every Raptor FluoroPhenyl column gives a consistent performance that you can count on: consider it done.



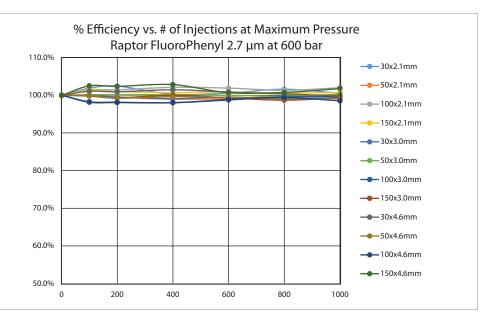


Figure 2: Strict quality control ensures Raptor FluoroPhenyl columns are exceptionally reproducible, so you get predictable performance from every column.




Reliable, reproducible fluorophenyl column performance.

| Peaks 1. Baccatin III 2. Docetaxel 3. Paclitaxel | tr (min) 0.97 1.25 1.33 | Precursor lo 587.0 808.1 854.1 | on Produc 40! 527 569 | 5.1 7.3 | Product Ion 2 105.0 226.1 286.2 |
|--|----------------------------------|---|--------------------------------|------------|--|
| | | | 3 | | |
| Lot 1 | | 1 | | | |
| Lot 2 | | | | | |
| Lot 3 | | | | | |
| Lot 4 | | | | | |
| Lot 5 | | | _//\ | | |
| Lot 6 | | | | | |
| 0.1 0.2 0.3 0.4 | 0.5 0.6 0.7 0.8 | 8 0.9 1.0 1.1 Time (min) | 1.2 1.3 1.4 | 1.5 1.6 1. | 7 1.8 1.9 2.0 LC_BA0352 |

Column: Raptor FluoroPhenyl (cat.# 931955E); Dimensions: 50 mm x 3 mm ID, Particle Size: 5 µm; Temp.: 35 °C; Sample: Diluent: Water; Conc.: 100 ng/mL; Inj. Vol.: 5 µL; Mobile Phase: A: 0.1% Formic acid in water; B: 0.1% Formic acid in acetonitrile; Gradient (%B): 0.00 min (25% B), 2.00 (95% B), 2.01 (25% B), 3.50 (25% B); Flow: 0.8 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM; Instrument: UHPI C.

Figure 3: From start to finish, Raptor FluoroPhenyl columns provide accurate, reproducible results.

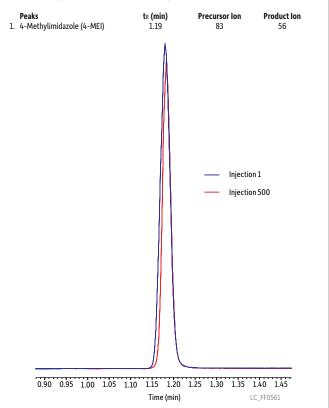

Column: Raptor FluoroPhenyl (cat.# 9319A52); Dimensions: 50 mm x 2.1 mm ID, Particle Size: 2.7 μm; Temp.: 35 °C; Sample: Diluent: Acetonitrile; Conc.: 100 ng/mL; Inj. Vol.: 5 μL; Mobile Phase: A: 0.1% Formic acid in water; B: 0.1% Formic acid in acetonitrile; Gradient (%B): 0.00 min (95% B), 2.00 (30% B), 2.01 (95% B), 3.50 (95% B); Flow: 0.6 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM: Instrument: UHPLC.



More Separating Power than a C18

C18 columns work well for many compounds, but they just don't work for everything. Raptor FluoroPhenyl columns can provide greater selectivity and retention for analytes that are not easily separated by C18 phase chemistry. For example, interest in vitamin D status is on the rise in clinical diagnostics, but accurate analysis is only possible if the epimeric forms of both vitamin D2 and D3 25-hydroxy metabolites can be distinguished. Typical reversed-phase C18 columns cannot separate these isobaric epimers, which differ in bioactivity, but the new Raptor FluoroPhenyl column provides adequate chromatographic resolution so accurate results are generated and the proper diagnosis can be made.

Figure 4: Reversed-phase C18 columns do not have the right selectivity or retention mechanism to separate the epimers of vitamin D2 and D3 25-hydroxy metabolites. Epimers do not separate on a C18, even in a 14-minute analysis time. Conc Conc MRM MRM Peaks (ng/mL) Peaks tR (ng/mL) 1. 25-Hydroxyvitamin D3 401.5/383.4 9.36 1. 25-Hydroxyvitamin D2 413.5/355.5 10.38 50 50 2. 3-Epi-25-hydroxyvitamin D3 401.5/383.4 9.36 2. 3-Epi-25-hydroxyvitamin D2 413.5/355.5 10.38 2.0 8.0 11.0 12.0 13.0 1.0 2.0 3.0 4.0 5.0 6.0 7.0 8.0 9.0 10.0 11.0 12.0 13.0 LC CF0649 Time (min) Column: Raptor ARC-18 (cat.# 9314A12); Dimensions: 100 mm x 2.1 mm ID, Particle Size: 2.7 µm; Temp.: 30 °C; Sample: Diluent: Water:methanol (50:50); Conc.: 25-50 ng/mL; Inj. Vol.: 5 µL; Mobile Phase: A: 0.1% Formic acid in water; B: Methanol; Gradient (%B): 0.00 min (75% B), 4.00 (80% B), 12.00 (80% B), 12.10 (75% B); 14.00 (75% B); Flow: 0.5 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM; Instrument: HPLC.

Figure 5: Raptor FluoroPhenyl columns have the selectivity and retention you need to quickly and easily separate compounds that coelute on a C18, such as the epimeric forms of vitamin D2 and D3 25-hydroxy metabolites. **Raptor FluoroPhenyl** Raptor reproducibility columns easily separate lets you develop assays compounds that coelute with confidence. on a C18. Lot 1 Conc Peaks MRM (ng/mL) tR 1. 25-Hydroxyvitamin D3 401.5/383.4 3.59 2. 3-Epi-25-hydroxyvitamin D3 401.5/383.4 3.78 2.0 2.5 3.0 4.0 4.5 Lot 2 Conc. **Peaks** MRM (ng/mL) 1. 25-Hydroxyvitamin D2 413.5/355.5 3.73 50 Lot 3 2. 3-Epi-25-hydroxyvitamin D2 413.5/355.5 3.91 25 1.5 2.0 3.0 5.5 1.0 1.5 2.0 2.5 3.0 3.5 4.0 4.5 5.0 LC_CF0646 Time (min) Time (min) LC CF0644

Column: Raptor FluoroPhenyl (cat.# 9319A1E); Dimensions: 100 mm x 3 mm ID, Particle Size: 2.7 µm; Temp.: 30 °C; Sample: Diluent: Water:methanol (50:50); Conc.: 25-50 ng/mL; Inj. Vol.: 5 µL; Mobile Phase: A: 0.1% Formic acid in water; B: Methanol; Gradient (%B): 0.00 min (75% B), 4.00 (85% B), 4.10 (100% B), 5.00 (100% B), 5.01 (75% B), 7.00 (75% B); Flow: 0.6 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM;

Instrument: HPLC

Get the Power of HILIC and RP Modes in One LC Column


HILIC chromatography is becoming the go-to solution for compounds that are difficult to retain on a C18. The Raptor FluoroPhenyl column gives chromatographers the flexibility to evaluate compound retention in both reversed-phase and HILIC modes. The analysis of 4-methylimidazole (4-MEI), which is a byproduct of caramel coloring in foods and beverages, can be problematic by reversed-phase chromatography due to very limited retention. However, 4-MEI is well retained on a Raptor FluoroPhenyl column and can easily be analyzed using HILIC mode and simple LC and LC-MS/MS compatible mobile phases.

Figure 6: Sometimes, adequate retention cannot be obtained with a C18. The Raptor FluoroPhenyl column performs dependably in either HILIC or RP mode, so you can use the mode that is best for your analytes. Raptor FluoroPhenyl columns give you the flexibility to work in both reversed-phase and HILIC modes. Peaks tr (min) Precursor Ion Product Ion 1. 4-Methylimidazole (4-MEI) 1.19 83 Lot 1 **HILIC retention of 4-MEI** Lot 2 Lot 3 0.90 0.95 1.00 1.05 1.10 1.15 1.20 1.25 1.30 1.35 1.40 1.45 1.50 Time (min) 0.00 0.20 0.40 0.60 0.80 1.00 1.20 1.40 1.60 1.80 2.00 2.20 2.40 2.60 2.80 3.00 3.20 3.40 Time (min) LC FF0559 Column: Raptor FluoroPhenyl (cat.# 9319A52); Dimensions: 50 mm x 2.1 mm ID; Particle Size: 2.7 μm; Temp.: 35 °C; Sample: Diluent: Acetonitrile; Conc.: 100 ng/mL; Inj. Vol.: 5 μL; Mobile Phase: A: 0.1% Formic acid in water; B: 0.1% Formic acid in acetonitrile; Gradient (%B): 0.00 min (95% B), 2.00 (30% B), 2.01 (95% B), 3.50 (95% B); Flow: 0.6 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM; Instrument: UHPLC.



Fast, Accurate Analysis of Basic Compounds

Taxane drugs—such as paclitaxel, docetaxel, and their precursor, baccatin III—are early chemotherapy treatment options. Accurate analysis is critical because these drugs are used for many types of metastatic cancers. As shown here, the selectivity of the Raptor FluoroPhenyl column provides excellent retention and resolution of these structurally similar compounds. Reliable results for these basic compounds can be obtained in fast analysis times using LC-MS/MS friendly solvents.

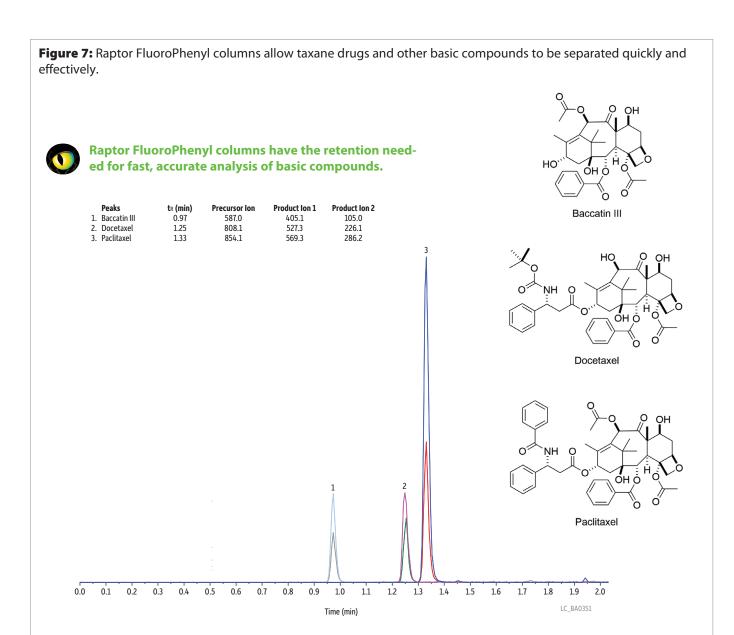


Column: Raptor FluoroPhenyl (cat.# 931955E); Dimensions: 50 mm x 3 mm ID, Particle Size: 5 µm; Temp.: 35 °C; Sample: Diluent: Water; Conc.: 100 ng/mL; Inj. Vol.: 5 µL; Mobile Phase: A: 0.1% Formic acid in water; B: 0.1% Formic acid in acetonitrile; Gradient (%B): 0.00 (25% B), 2.00 (95% B), 2.01 (25% B), 3.50 (25% B); Flow: 0.8 mL/min; Detector: MS/MS; Ion Mode: ESI+; Mode: MRM; Instrument: UHPLC.



Exceptional Selectivity for Clinical Analyses

The analysis of normetanephrine and metanephrine provides another example of the power of Raptor FluoroPhenyl columns for analyzing basic compounds. Accurately determining these metabolites of epinephrine/norepinephrine in plasma or urine is one of the best diagnostic tests for neuroendocrine tumors (pheochromocytomas). Normetanephrine and metanephrine are difficult to retain by typical C18 reversed-phase chromatography; however, the Raptor FluoroPhenyl column provides a simple, fast chromatographic solution to this challenging assay. The Raptor FluoroPhenyl column's unique combination of aromatic retention and cation exchange mechanisms are not provided by a C18 column and result in reliable, high-quality separations.

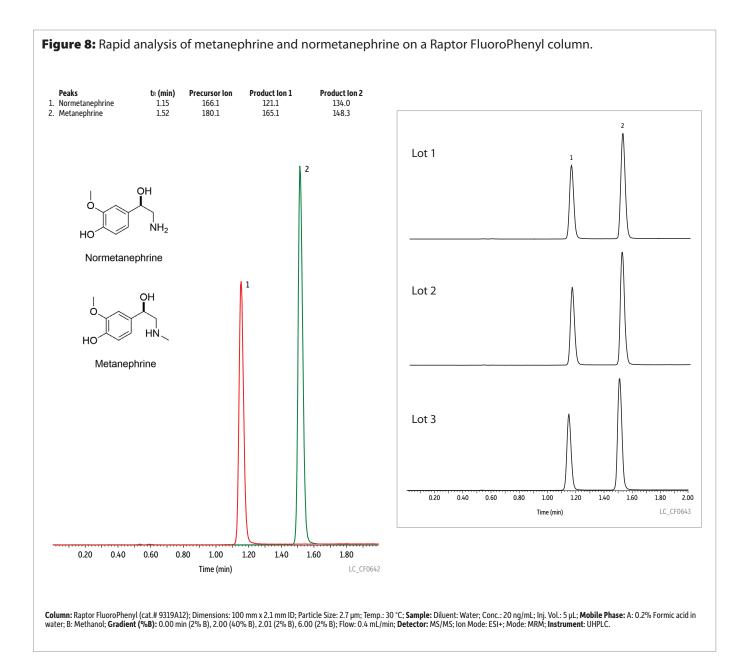

Dependable Raptor FluoroPhenyl Columns Give You the Flexibility to Use Both HILIC and RP Modes

Raptor FluoroPhenyl LC Columns (USP L43)



| Length | 2.1 mm cat.# | 3.0 mm cat.# | 4.6 mm cat.# |
|----------------|-----------------|-----------------|-----------------|
| 1.8 µm Columns | | | |
| 30 mm | 9319232 | _ | _ |
| 50 mm | 9319252 | 931925E | _ |
| 100 mm | 9319212 | 931921E | _ |
| 150 mm | 9319262 | _ | _ |
| 2.7 µm Columns | | | |
| 30 mm | 9319A32 | 9319A3E | 9319A35 |
| 50 mm | 9319A52 | 9319A5E | 9319A55 |
| 100 mm | 9319A12 | 9319A1E | 9319A15 |
| 150 mm | 9319A62 | 9319A6E | 9319A65 |
| 5 μm Columns | | | |
| 30 mm | _ | 931953E | _ |
| 50 mm | 9319552 | 931955E | 9319555 |
| 100 mm | 9319512 | 931951E | 9319515 |
| 150 mm | 9319562 | 931956E | 9319565 |
| 250 mm | _ | _ | 9319575 |
| | | | |

EXP Reusable Fittings for HPLC & UHPLC

for 10-32 fittings and 1/16" tubing

Effortlessly achieve 8,700+ psi HPLC seals by hand! (Wrench tighten to 20,000+ psi.) Hybrid titanium/PEEK seal can be installed repeatedly without compromising your seal.



| Description | qty. | cat.# | |
|--|--------|-------|--|
| EXP Hand-Tight Fitting (Nut w/Ferrule) | ea. | 25937 | |
| EXP Hand-Tight Fitting (Nut w/Ferrule) | 10-pk. | 25938 | |
| EXP Hand-Tight Nut (w/o Ferrule) | ea. | 25939 | |

Hybrid Ferrule U.S. Patent No. 8201854, EXP Holders U.S. Patent No. 8696902, EXP2 Wrench U.S. Patent No. D766055. Other U.S. and Foreign Patents Pending. The EXP, Free-Turn, and the Opti- prefix are registered trademarks of Optimize Technologies, Inc.

Experience Selectivity Accelerated.
Order the Raptor FluoroPhenyl today at www.restek.com/raptor

Raptor EXP Guard Cartridges—for All Raptor Columns



Protect your investment, extend the life of our already-rugged LC columns, and change guard column cartridges by hand without breaking fluid connections—no tools needed! Great with any Raptor column to get ultimate protection from particulates and matrix contamination, especially when using dilute-and-shoot or other minimal sample preparation techniques.

EXP Direct Connect Holder

| Description | qty. | cat.# |
|---|------|-------|
| EXP Direct Connect Holder for EXP Guard Cartridges (includes hex-head fitting & 2 ferrules) | ea. | 25808 |
| Maximum holder pressure: 20 000 psi (1 400 bar) | | |

Raptor EXP Guard Column Cartridges

| | Particle | | 5 x 2.1 mm | 5 x 3.0 mm | 5 x 4.6 mm |
|---|----------|-------|------------|------------|------------|
| Description | Size | qty. | cat.# | cat.# | cat.# |
| Raptor FluoroPhenyl EXP Guard Column Cartridge | UHPLC | 3-pk. | 9319U0252 | 9319U0253 | |
| Raptor FluoroPhenyl EXP Guard Column Cartridges | 2.7 µm | 3-pk. | 9319A0252 | 9319A0253 | 9319A0250 |
| Raptor FluoroPhenyl EXP Guard Column Cartridges | 5 µm | 3-pk. | 931950252 | 931950253 | 931950250 |

1,034 bar/15,000 psi* (UHPLC), 600 bar/8,700 psi (2.7 μm); 400 bar/5,800 psi (5 μm).

Raptor SPP LC columns combine the speed of SPP with the resolution of USLC technology. Learn more at www.restek.com/raptor

UltraShield UHPLC PreColumn Filter—for 1.8 µm Raptor Columns

Pair 1.8 µm Raptor columns with an UltraShield filter instead of a guard cartridge to protect against particulates, minimize extra column volume, and maximize UHPLC sample throughput when using SPE, SLE, or other extensive sample preparations.

| - | Filter | | | |
|------------------------------------|-------------|-------|-------|--|
| Description | Porosity | qty. | cat.# | |
| UltraShield UHPLC PreColumn Filter | 0.2 µm frit | ea. | 25809 | |
| | | 5-pk. | 25810 | |
| | | 10 nk | 25011 | |





Questions about this or any other Restek product?

Contact Chromatographic Specialties Inc. at 1-800-267-8103 • tech@chromspec.com.

Restek patents and trademarks are the property of Restek Corporation. (See www.restek.com/Patents-Trademarks for full list.) Other trademarks in Restek literature or on its website are the property of their respective owners. Restek registered trademarks are registered in the U.S. and may also be registered in other countries.

 $\ensuremath{\text{@}}$ 2018 Restek Corporation. All rights reserved. Printed in the U.S.A.



^{*} For maximum lifetime, recommended maximum pressure for 1.8 µm particles is 830 bar/12,000 psi.